


PASSENGER CAR TYRE ACCESSORIES

PT100 BEAD LIFTING PRESSING DEVICE

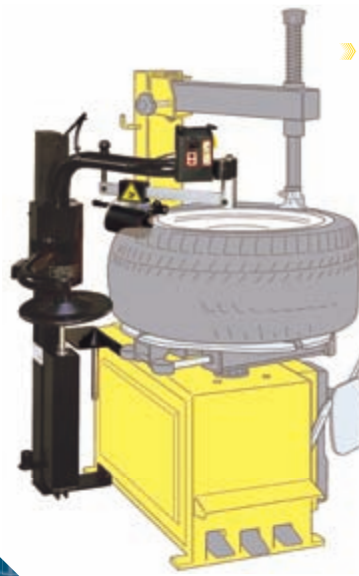

› Fits Sice models from **S408** to **S425**

Suitable for:

- › Run flat tyres
- › Low profile tyres

PT200 BEAD LIFTING PRESSING DEVICE



› **NEW** generation device to simplify mount and demount procedures, particularly on larger diameter wheels

› Fits all Sice models from **S415** to **S436**

Suitable for:

- › Run flat tyres
- › Low profile tyres
- › Pax tyres

OTHER ACCESSORIES INCLUDE

ARM MOTORCYCLE WHEEL ADAPTERS



TPA PLASTIC MOUNTING/DEMOUNTING TOOL HEAD PLUS SPARE REPLACEABLE PLASTIC BODIES



AR24 ADAPTERS TO INCREASE OUTSIDE CLAMPING ABILITY BY UP TO 4"



SVD VALVE CORE INSTALLER DUAL SIZE



AR69 ADAPTERS FOR WHEELS WITH A DIAMETER OF 6"- 9"



VP VALVE PULLER CORE INSTALLER



SPL3 REPLACEMENT PROTECTIVE PLASTIC COVERS FOR MOST TOOLS



THE SICE / TRS COMMITMENT

Sice automotive equipment is acknowledged worldwide for quality and reliability. In New Zealand the Sice range of Italian manufactured tyre equipment is distributed and supported by TRS Tyre & Wheel Limited, the country's leading supplier of tyres and wheels to the agricultural and industrial sectors. Available in a wide range of models, Sice product is competitively priced to suit a variety of applications. Supported by an extensive spare parts inventory, TRS also stock other models not featured in the brochure and a huge range of tyre changer accessories. Sice is fully supported by TRS providing a 12 month manufacturer's warranty. TRS also trade-in any older machines in reasonable condition regardless of brand. Models featured in this brochure are representative of products readily available. Information on other Sice products can be obtained by calling TRS.

For expert advice, detailed product information and a personalised quotation phone toll free 0800 336 334.



2006
TYRE EQUIPMENT RANGE

› AGRICULTURAL › INDUSTRIAL › TRANSPORT

› TYRE CHANGERS › WHEEL BALANCERS › ACCESSORIES

HEAD OFFICE
1 Imlay Place, Wanganui
Phone: 06 344 6385
Fax: 06 344 3769

AUCKLAND
1 Analie Place, East Tamaki
Phone: 09 273 4693
Fax: 09 273 4697

CHRISTCHURCH
36 Soter Road
Phone: 03 348 7245
Fax: 03 348 7255



SALES HOTLINE
0800 336 334



PASSENGER CAR TYRE CHANGERS

NEW! S408 SEMI-AUTOMATIC TYRE CHANGER

- › Clamping ability 11" to 22" outside, 13" to 24" inside
- › Simple robust side swing tool head
- › Single speed turntable
- › Models with and without GP airblast
- › Optimum performance and Italian quality at an affordable price

**S415 SEMI-AUTOMATIC TYRE CHANGER**

- › Clamping ability 11" to 22" outside, 13" to 24" inside
- › Powerful bead breaker
- › Single speed and two speed turntables available
- › Specialist accessories to suit many applications including alloy wheel protectors
- › Models with and without GP airblast available

**S419 AUTOMATIC TYRE CHANGER**

- › Clamping ability 11" to 22" outside, 13" to 24" inside
- › Pneumatically operated tilting post
- › Standard 2 speed turntable
- › Models with and without GP airblast
- › Powerful bead breaker with double acting pneumatic cylinder

**S435 SUPER-AUTOMATIC TYRE CHANGER**

- › Clamping ability 12" to 24" outside, 14" to 26" inside
- › Height adjustable turntable - reduces back strain
- › New model heavy duty machine
- › Bead breaker support with variable distance and angle
- › Pneumatically overturned vertical post
- › GP airblast standard
- › Pneumatic positioning of the turret
- › Bead lifting/pressing device PT200 available

**S436 TOP SUPER-AUTOMATIC TYRE CHANGER**

- › Top range machine for high volume tyre shops
- › Bead breaker support with variable distance and angle
- › Clamping ability 12" to 24" outside, 14" to 26" inside
- › Quick change device for tool heads
- › Standard 2 speed turntable
- › PTX bead lifting/pressing help arm standard attachment suitable for:
 - › Low profile tyres
 - › Pax tyres
 - › Run flat tyres
- › Pneumatically operated tilt post
- › GP airblast standard
- › Height adjustable turntable - reduce back strain



TRUCK AND AGRICULTURAL TYRE CHANGERS

S520 TRUCK TYRE CHANGER

- › Suitable for truck and bus tyres
- › Two rollers for bead breaking, mounting and demounting
- › 14.5" to 24.5" clamping ability
- › Max wheel dia. 1400mm
- › Integrated control unit

**S540 UNIVERSAL TRUCK TYRE CHANGER**

- › Suitable for truck, bus and agricultural tyres
- › Universal self centering chuck
- › 14" to 56" clamping ability
- › Clockwise and anti clockwise rotation of chuck
- › Max wheel dia. 2300mm
- › Portable control unit

**S545 UNIVERSAL SEMI-AUTOMATIC TRUCK TYRE CHANGER**

- › Suitable for truck, bus and agricultural tyres
- › Clockwise and anti-clockwise rotation of chuck
- › 14" to 56" clamping ability
- › Automatic tool arm tilt back
- › Max wheel dia. 2300mm
- › Portable control unit
- › Universal self centering chuck

**S550 UNIVERSAL AUTOMATIC TRUCK TYRE CHANGER**

- › Suitable for truck, bus and agricultural tyres
- › Simultaneous movement of spindle carrier and tool arm
- › 14" to 56" clamping ability
- › Automatic rotation of tool arm head
- › Max wheel dia. 2500mm
- › Clockwise and anti clockwise rotation of chuck
- › Universal self centering chuck

**NEW! CAR, MOTORCYCLE AND VAN WHEEL BALANCERS****S616 ELECTRONIC COMPUTERISED WHEEL BALANCER**

- › Electronic microprocessor controlled
- › Motorless hand spin
- › Max wheel dia 900mm
- › Max rim dia. 23"
- › Max rim width 20"
- › Max wheel weight 65kg

**S626 ELECTRONIC COMPUTERISED WHEEL BALANCER**

- › 16-bit data microprocessor with self calibration and diagnostic functions
- › User friendly simple-touch data entry
- › Very low RPM for guaranteed fast work cycles
- › Max rim dia. 25"
- › Max wheel weight 65kg

